


Technical Information

Line Pressure:	Up to 125 psi (8 bar)
Medium:	Water, air and fluids compatible with contact seal
Main Body Thread:	BSP taper
Operating Pressure:	40-100 psi (2.8 - 6.9 bar)
Operating Medium:	Pneumatic or hydraulic
Operating Connection:	1/8" BSP


Applications

The Perrett Hydrovalve range is regularly used in industries such as oil distribution, water services, foundry machinery, laundry, concrete mixing plant, sand blast equipment, air dryers and many other remote fluid control situations.


Identifying your Hydrovalve

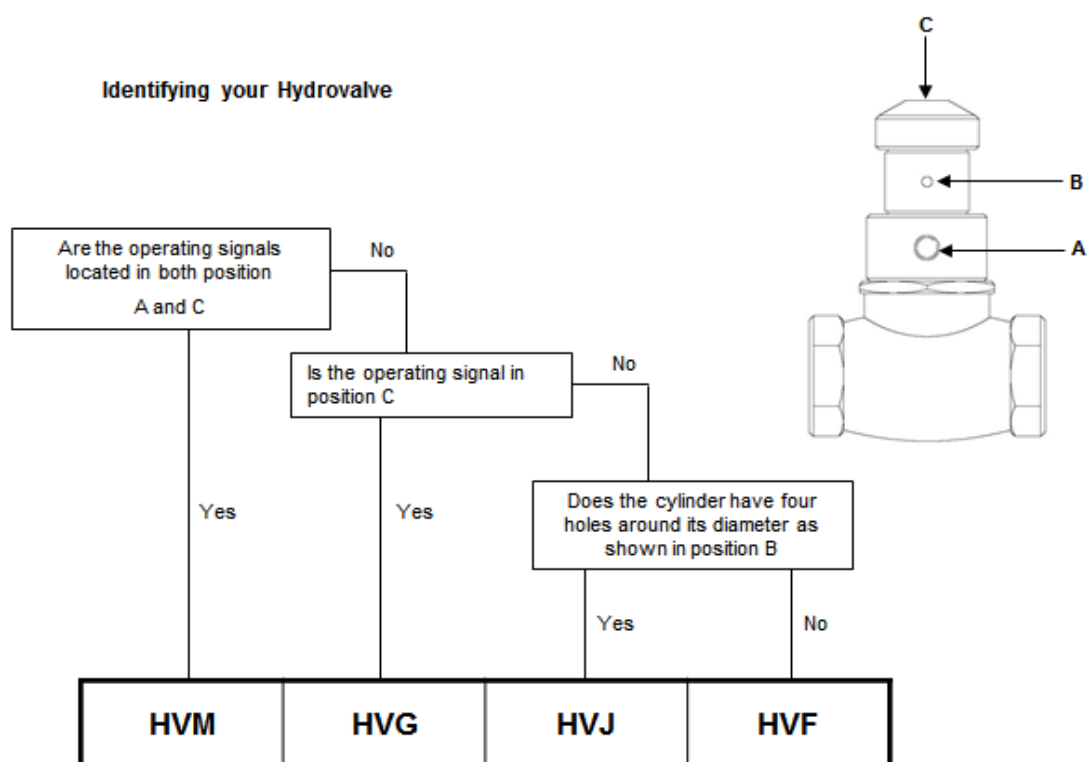


HVF

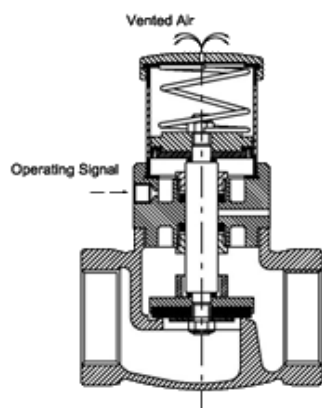

HVG

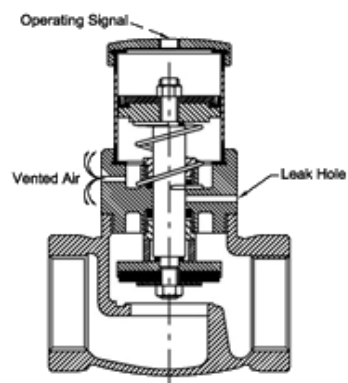

HVJ

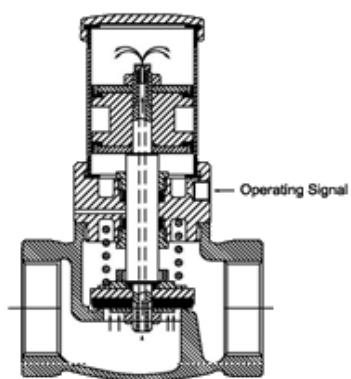

HVM

